

# CHISHOLM-MOORE HOIST CORPORATION

DIVISION OF COLUMBUS-McKINNON CHAIN CORP.

5047 Fremont Avenue, TONAWANDA, N. Y.

## BRANCHES

NEW YORK, N. Y.

CHICAGO, ILL.

CLEVELAND, OHIO

PHILADELPHIA, PA.

ST. CATHARINES, ONT., McKinnon-Columbus Chain, Ltd.

## Products

"AL-LITE" ALUMINUM BALL BEARING CHAIN HOISTS.  
 "CYCLONE" HAND POWER CHAIN HOISTS.  
 "BLUE BOY" HAND POWER DIFFERENTIAL CHAIN HOISTS.  
 "CYCLONE" ELECTRIC CHAIN HOISTS.  
 "C-M" WIRE ROPE ELECTRIC HOISTS.  
 "HI-UP" LOW HEADROOM ELECTRIC HOISTS.  
 "MATCHLESS" TIMKEN BEARING TROLLEYS.



"MOORE" BALL BEARING TROLLEYS.  
 "C-M" OVERHEAD TRAVELING CRANES.  
 Also:  
 "Standard" Hand Power Screw Chain Hoists.  
 "C-M" Low Headroom Trolley Hoists.  
 "C-M" Jib Cranes.  
 Special Cranes.  
 "C-M" I-Beam Monorail Systems.

## HAND POWER CHAIN HOISTS



At Left:

### "Cyclone" Ball Bearing Hoist

Capacities  $\frac{1}{4}$  to 6 tons  
 High speed. Spur geared  
 8 ball bearings, 4 roller bearings  
 90% efficiency  
 Grease bath lubrication  
 Exclusive gyrating yokes  
 "Inswell" load chain  
 "Cyclone" Roller Bearing Hoists  
 Capacities 8 to 40 tons



At Left:

### "Al-lite" Safety Hoist (Alcoa Aluminum)

Capacities  $\frac{1}{4}$ ,  $\frac{1}{2}$ , 1 and 2 tons  
 30% lighter  
 Ball bearing  
 Adjustable brake  
 High speed. Spur geared  
 Fewer parts  
 Enclosed. Oiltight  
 Safety overload governor




At Left:

### "Blue Boy" Differential Hoist


Capacities  $\frac{1}{4}$  to 3 tons  
 Heavy sheaves  
 Reinforced ribbed frames  
 "Inswell" chain  
 Drop-forged hooks  
 Very durable  
 Copperized chain  
 Painted blue duco

## ELECTRIC HOISTS




### "C-M" Wire Rope Electric Hoist

Capacities  $\frac{1}{4}$  to 10 tons, inclusive  
 Compact, simple design  
 Very accessible  
 Hyatt bearings  
 Hand power or motor driven trolleys  
 Timken bearing wheels  
 Single or variable speeds



### "Cyclone" Electric Chain Hoist


Capacities  $\frac{1}{2}$  to 3 tons, inclusive  
 8 ball bearings and 4 roller bearings  
 Magnetic brake. Positive control  
 Low headroom. Unlimited lift  
 Upper and lower safety limits  
 Hook or trolley suspension  
 Light weight. Low price



### "Hi-Up" Wire Rope Electric Hoist


Capacities  $\frac{1}{4}$  to 1 ton, inclusive  
 Minimum headroom  
 Maximum lift  
 Very accessible  
 Push button control  
 Magnetic brake  
 Accurate control  
 Hyatt bearings

## CRANES AND TROLLEYS




### Matchless Timken Bearing Trolley

Capacities  $\frac{1}{2}$  to 40 tons, inclusive  
 Plain or geared  
 8 Timken bearings  
 Flangeless wheels  
 Vertical guide rollers  
 Safety lugs and bumpers

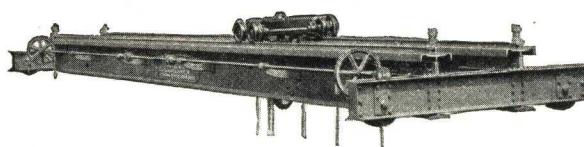

### "C-M" Overhead Traveling Cranes

Capacities  $\frac{1}{2}$  to 40 tons, inclusive  
 Hand power and motor drive  
 Single and double I-beam  
 Hyatt or Timken roller bearings  
 Floor or cab control



### "Moore" Ball Bearing Trolley

Capacities 1 and 2 tons  
 Pressed steel wheels  
 Ball bearings  
 Safety lugs and bumpers  
 Light weight  
 Adjustable